




STRETCHPAK MACHINE

the **STARVIEW ADVANTAGE**



FASP8-1618
FULLY AUTOMATIC STRETCH PAK MACHINE

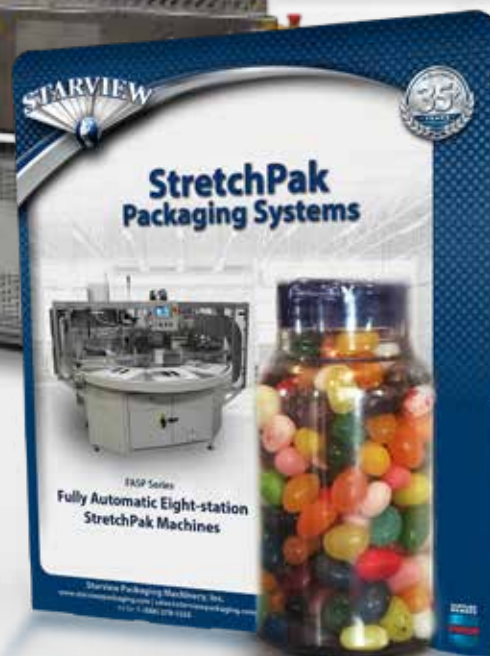

CONSUMER GOODS



FOOD



MEDICAL DEVICE



PHARMACEUTICAL



NUTRACEUTICAL



AFTERMARKET PARTS

Markets we serve everyday

INNOVATIVE PACKAGING MACHINES
www.StarviewPackaging.com

FASP8-1618

AUTOMATIC STRETCHPAK MACHINE

YOUR MARKET ... OUR SOLUTIONS

Starview's **FASP8-1618** Automated rotary type StretchPak machines are ideal for high volume or JIT production. Given the proper conditions these machines are capable of up to 16 cycles per minute in production. The Automated Stretch Pak machines are built with the capability to feed cards, form cavities, fold over cards, RF seal cards and unload finished packages. With three (3) open loading stations these machines are ideal for hand placed or automated product loading or where multiple items are to be placed in a single package.

An accurate cam drive indexer is used for precision sealing/forming fixture position repeatability. Fixture advancement speed is adjustable. The time interval at which the fixtures index is also adjustable to pace the operator(s) who load product(s) as they pass the open stations. Stretch Pak card(s) are fed from easily loaded quick-change feeder magazines. Forming, fold-over and RF welding cycles are automatic and controlled by the PLC. Finished packages are automatically transferred from the machine to a conveyor with a linear transfer pick and place unit where they travel through the heated air knife. An optional inline slitter is available to separate cost-efficient gang-run cards.

All **FASP8-1618** machines feature automatic system start-up where the stations are turned on at the appropriate interval and an automatic system clear that deactivates the stations in the reverse order. This saves manually turning on each function until all sealing/forming fixtures are filled.

the **STARVIEW** **ADVANTAGE**



UNLOAD STATION WITH PACKAGE SLITT

- Operator friendly machine to simplify manual or automated product loading.
- ANSI Class 4 operator safety for the highest level of operation protection available.
- An industry exclusive advanced technology Solid State RF sealing press gives maximum package sealing power efficiency and precision sealing program repeatability.
- Pendant mounted color touch screen HMI for the ultimate in operator convenience and accessibility.
- A Starview exclusive remote access via standard Ethernet hardwire or optional Wi-Fi router gives management access to process information in real time from the machine.
- Positive action package fold-over mechanism eliminates damaged packages and machine jams.
- Quick-change tooling throughout the machine for efficient package changeover.
- Industry leading design, construction, features and customer support.



Markets we serve everyday

more on next page

FASP8-1618

SPECIFICATIONS

	FASP8-1618
Maximum card (single or gang) size unfolded:	16.0" x 18.0"
Form press maximum size:	15.0" x 17.0"
Maximum standard forming depth:	2.5"
RF sealing press maximum size:	16.0" x 9.0"
RF sealing power:	High-efficiency solid state 3.5 KW
Sealing press oscillation frequency:	27.12 MHz
Open loading stations:	3
Cycle speed:	Up to 16 cycles per minute on average
Approximate weight:	3,000 LB.
Electrical:	208-230 Volts / 3 PH / 60 Amps

Specifications and model availability are subject to change without notice.



REQUEST
A
QUOTE

Please request specific model quotations for complete pricing, specifications and options from your local distributor. Feel free to contact Starview to obtain the contact information for the authorized distributor in your area.



Starview Packaging Machinery, Inc.

Toll Free: 888-278-5555

www.starviewpackaging.com

sales@starviewpackaging.com

Copyright 2026 Starview Packaging Machinery, Inc.

